

SM 620 A

TECHNICAL DATA




Weight	5.200 kg
Length (basic machine)	6.840 mm
Width (basic machine)	2.450 mm
Height (basic machine)	2.750 mm
Motor type	Spur gear motor
Rated power	15 kW / 20 PS
Torque	1.160 Nm
Screen drum	
Diameter	2.000 mm
Length	5.500 mm
Mesh size	selectable
Mesh shape	selectable (round- and/or squared mesh size, wire mesh size)
Material thickness	selectable
Rotational speed	10 - 20 rpm
Screen area	30,5 m ²

The technical data are approximate and depends on the machine equipment (subject to change without notice).



Applications

With the screening machines of the SM and SST series it is possible to screen waste and raw materials such as compost, soil, green waste, biowaste, waste wood, root wood, household waste, commercial waste, mixed construction waste, plastics, glass, paper, sand, gravel, scrap, slag, and other recyclable materials.

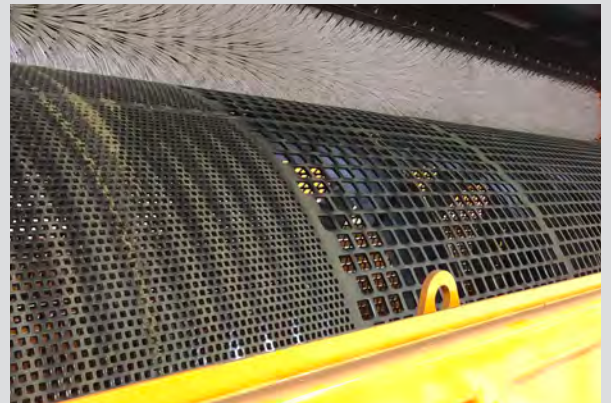

All advantages at a glance

- Simple and robust technology
- Flexible results through tailored drums (punched plate, mesh wire, changeable plates)
- Quick drum change
- Maximum throughput
- Almost maintenance-free
- Multiple sieve sections possible
- More than thousand times proven