



DSP-SERIES


STATIC PULVERISERS



DemaPower system

A unique cylinder technique, 20% more power and extremely fast cycle times!

(The Extreme version of the DSP-series is equipped with the "well known" DemaPower-System!)

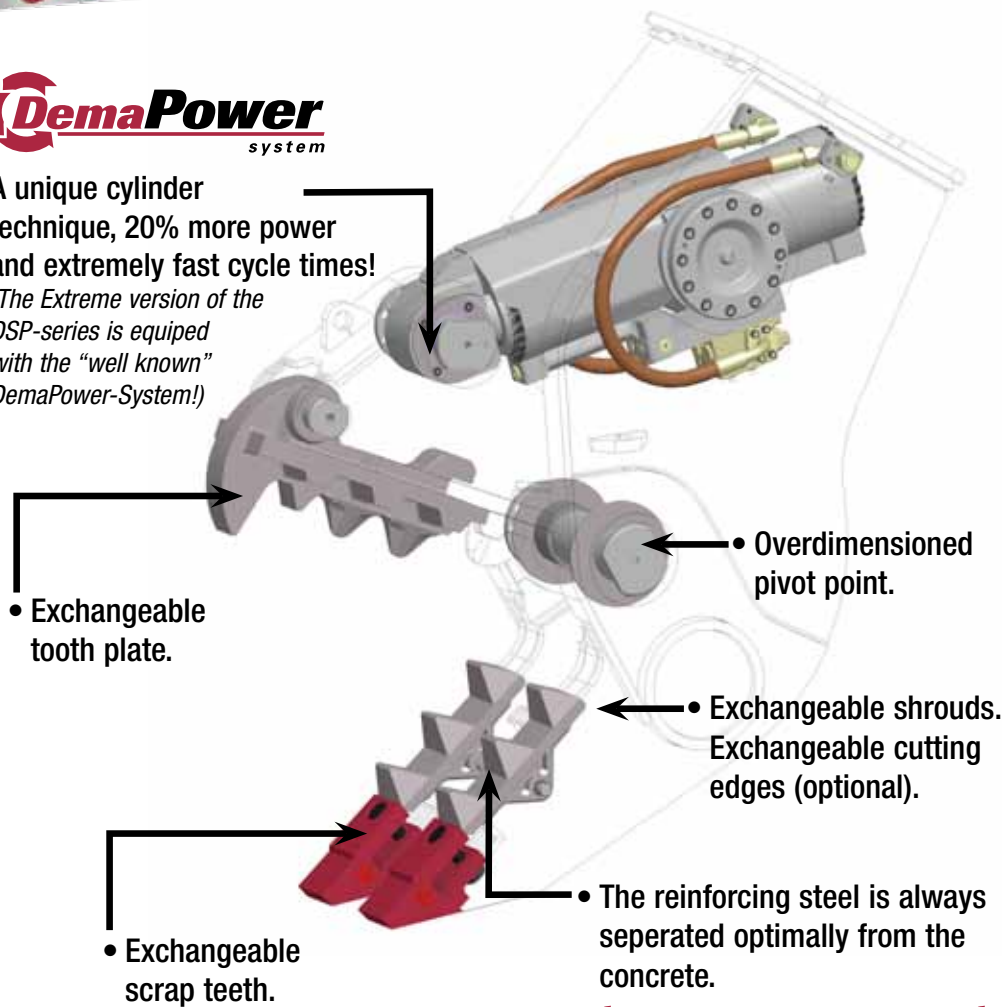

Type	DSP-30	<i>Extreme</i> DSP-30	DSP-45	<i>Extreme</i> DSP-45	DSP-60	<i>Extreme</i> DSP-60
Carrier weight*	20-35 ton	20-35 ton	30-50 ton	30-50 ton	42-65 ton	42-65 ton
Weight**	2100 kg	2100 kg	2600 kg	2600 kg	3600 kg	3600 kg
Closing force front tooth (ca.)	75 t	90 t	100 t	120 t	115 t	140 t

Dimensions							
Jaw opening	A	885 mm	885 mm	1015 mm	1015 mm	1185 mm	1185 mm
Width upper jaw	B	350 mm	350 mm	400 mm	400 mm	450 mm	450 mm
Width lower jaw	C	490 mm	490 mm	525 mm	525 mm	565 mm	565 mm
Depth	D	840 mm	840 mm	900 mm	900 mm	1025 mm	1025 mm
Height	E	1800 mm	1800 mm	1950 mm	1950 mm	2250 mm	2250 mm
Length of cutting blades***		200 mm	200 mm	200 mm	200 mm	250 mm	250 mm

Hydraulic							
Opening/Closing Pmax		350 bar	350 bar	350 bar	350 bar	350 bar	350 bar
Flow		150-250 l/min	150-250 l/min	200-300 l/min	200-300 l/min	300-400 l/min	300-400 l/min
Cycle time Opening/Closing		2,5 / 2,5 sec	2,0 / 2,3 sec	2,6 / 2,9 sec	2,0 / 2,9 sec	2,8 / 3,0 sec	2,0 / 2,8 sec

04-2013 *Depending on capacity of carrier ** Weight excluding bracket *** Optional

Subject to change without notice.

Trendsetter in Demolition and Recycling Equipment